


HHBD03SK-01 + WPC03

3 TON SINGLE SPEED WITH MOTORIZED TROLLEY
3-PHASE 230V/460V

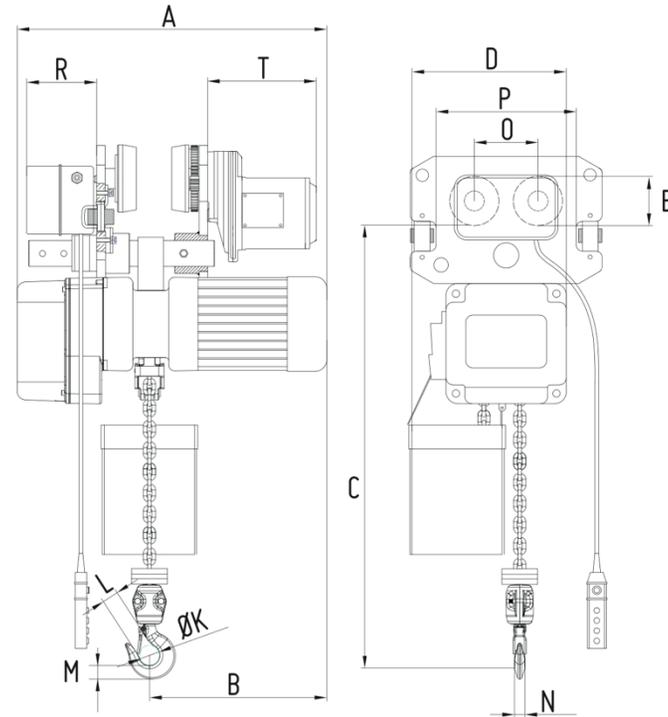

Product Code	Capacity	Headroom (C)	A	B	D	E	K	L	N	O	P	R	T
	tons	inches	inches	inches	inches	inches	inches	inches	inches	inches	inches	inches	inches
HHBD03SK-01 +WPC03	3	28	31	15.5	18.3	5.5	2.3	1.6	1.4	5.5	10.4	5.6	9

Product Code	Capacity	Standard Lift Height	Push Button Cord	Lifting Speed	Motor Output	Control Voltage	Lifting Motor Rated		Load Chain Size Ø	Chain Fall Lines	Trolley Speed	Trolley Output	Trolley Motor Rated		Trolley Minimum Curve Radius	Trolley Flange Width	Net Weight
							Current (amps)						Current (amps)				
	tons	feet	feet	ft/min	hp	Volts	@230v	@460v	mm	ft/min	hp	@230v	@460v	inches	inches	lbs.	
HHBD03SK-01 +WPC03	3	20	17	21.6	4	110	15	8.5	Ø 11.2 x 34	1	48	0.5	3.2	1.6	39.4	3.94-12	434.3